



PEBBLESTONE PAVING SLABS

Elegance In Stone

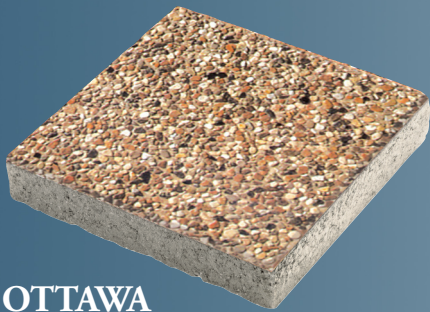

OTTAWA

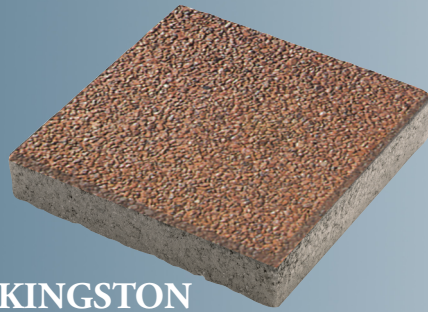

KINGSTON
RED



PEA

Distributed by:



Note: the color range as shown is as accurate as the printing process allows. Final specifications should be made from actual samples.

PEBBLESTONE PAVING SLABS

Elegance In Stone

Landscapers Depot Pebble stone Paving slabs are beautiful because of their natural look. Actual authentic earth stones are brought in from different areas of Ontario and the United States. To be used in the manufacture of our various styles of slabs.

The natural pebble texture of this product blends beautifully with any garden or landscape surrounding to maintain its natural look.

Pebble stone Paving slabs maintain their beauty and natural color over time and will not chip.

Pebble stone Paving slabs installed by themselves in their own design variations look great at any time. They also combine perfectly with plain colored slabs or the interlocking paving stones to create a more diverse design. Dozens of interesting patterns can be made using the standard size (pebble stone or plain) slabs incorporating the interlocking paving stones. A few layout patterns to choose from are illustrated below.

SPECIFICATIONS:

COLOURS	AVAILABLE SIZES FOR ALL STYLES			APPLICATION USE
	length	width	thickness	
ALABAMA OTTAWA PEA Gravel KINGSTON RED	50 cm	50 cm	4.5 cm	<i>patios & walkways</i>
	20"	20"	1 ³ / ₄ "	
			special order 6 cm 2 ³ / ₈ "	<i>driveways</i>
54 pieces per bundle				

INSTALLATION INSTRUCTIONS

Pebble stone Paving slabs are easy to install for patios, pool surroundings, sidewalks, driveways and rooftop applications.

Regardless of the soil type, if the area to be paved has the proper foundation prepared, and the patio stones are installed properly, they will not move.

FOR THE PATIOS AND WALKWAYS

As a general rule, excavate to a depth of 10cm - 13cm (4" - 5"), fill with bedding, concrete sand or chips and dust (screenings).

FOR DRIVEWAYS

As a general rule, excavate to a depth of 13cm - 20cm (5" - 8"), fill with 9 cm (3.5") of "A" gravel, level and compact, then cover with 3cm - 5cm (1" - 2") of bedding sand.






There is no definite rule of depth, it depends on the soil type. The measurements above should act as a guide but if you are unsure about your own application, consult your dealer. They will be happy to assist you.

After the base is leveled, compacted and gradually slopping away from building walls or foundations (for water runoff), the installation of the driveway stones (6cm thickness) *and or* interlocking stones in the desired pattern can begin.

The spaces between driveway and patio stones *and or* interlocking stones should be tight and consistent, with not more than 3mm - 4mm (1/8").

Finish the job by sweeping dry fine sand into the joints.

DESIGN VARIATIONS:

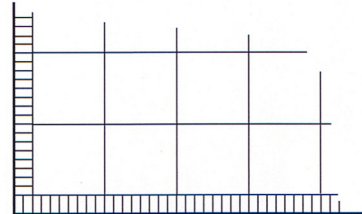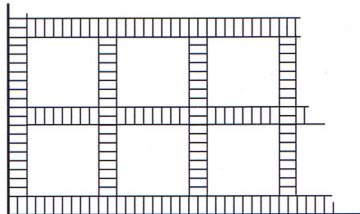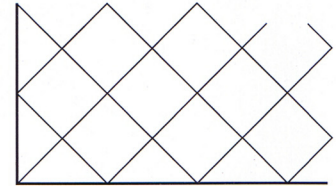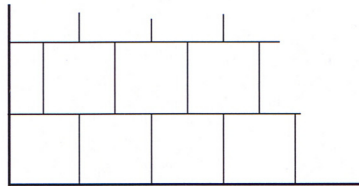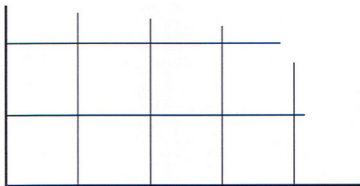

www.landscapersdepot.com

59 RTE 125
KINGSTON, N.H. 03848
Ph:1-603-642-6677
Fax:1-603-642-4191